

Kimbal 4 - Fixed Recessed Downlight


Product Code: KF4P12F27W

- The Kimbal 4 adds another layer of excellence to the Kimbal range of downlights offering a compact size and superior performance.
- With a Ø90mm cut-out and Ø105mm trim overall the recessed Kimbal 4 delivers all the key features required in specification product as well as a premium architectural aesthetic.
- Sustainability features with fully recyclable chassis & plastic free packaging.
- Product Description: Kimbal 4 Fixed Recessed Downlight Performance 6W Flush Narrow Beam 2700K Non Dim White


Kimbal 4 Family



Configured Product - KF4P12F27W

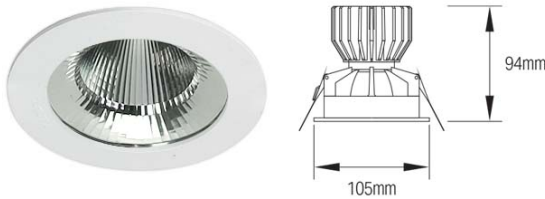

Photometrics

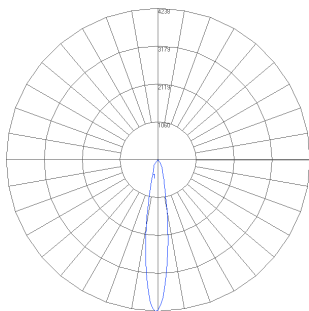

Selection

Series	Fixed Recessed Downlight
CRI	P Series CRI 80+
Output	LED Driver 150mA
CCT	2700K
Reflector	Narrow Beam Flush
Control	No Dimming
Lens	No Lens
ProSpec Option	Not Required
Seismic Restraint	Not Required
Colour	White

Technical

Warranty	5 years
Current	150 mA
Power	6.2 W
Lumen Output	685 lm
Efficacy	110.48
SDMC	3
R9 Value	12
Insulation Class	IC4-ICF
IP Rating	From below ceiling: IP20
IEC60598	Complies
AS/NZ60598	Complies
COI Compliance	No
Weight	Luminaire Body Weight: 370gms Driver Weight: 250 gms
Lifetime	L90/B10 > 50,000
Beam Angle	15°
Dimming	No Dimming

Dimension

Dimension	94mm x 105mm (90mm dia cutout)
Ceiling Thickness	10-30 mm
Rod Length	N/A
Cable Length	N/A

[Configure Here](#)